


## STACKING HARNESSES FOR DIPOLE ARRAYS

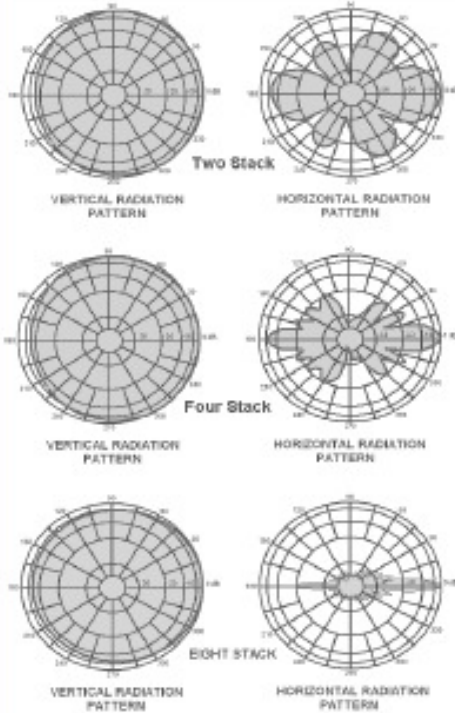

DOWN TILT HARNESSES MADE TO REQUIREMENT ON REQUEST.

ANY CONNECTOR CAN BE FITTED TO FEED POINT ON REQUEST.

HARNESSES CAN BE MOULDED TO DIPOLES OR OTHER ANTENNAS ON REQUEST, TO MINIMIZE LOSSES.

RFT ORDER CODE	DESCRIPTION	FREQ. IN MHz.	GAIN	POWER IN WATT	IMP. IN OHM	WEIGHT Kg.	TERMINATION	PACKED WIDTH In mm
SH-2	HARNESS FOR 2 DIPOLES	66 - 88	3 / 6	500	50	3.5	N MALE	300
SH-3	HARNESS FOR 4 DIPOLES	66 - 88	6 / 9	500	50	3.2	N MALE	300
SH-4	HARNESS FOR 2 DIPOLES	134 - 174	3 / 6	500	50	3.0	N MALE	300
SH-5	HARNESS FOR 4 DIPOLES	134 - 174	6 / 9	500	50	2.9	N MALE	300
SH-6	HARNESS FOR 2 DIPOLES	390 - 470	3 / 6	500	50	2.3	N MALE	300
SH-7	HARNESS FOR 4 DIPOLES	390 - 470	6 / 9	500	50	2.2	N MALE	300
SH-8	HARNESS FOR 2 DIPOLES	240 - 280	3 / 6	500	50	2.0	N MALE	300
SH-9	HARNESS FOR 4 DIPOLES	240 - 280	6 / 9	500	50	2.0	N MALE	300